



Nebulizer Selection

Flow Chart

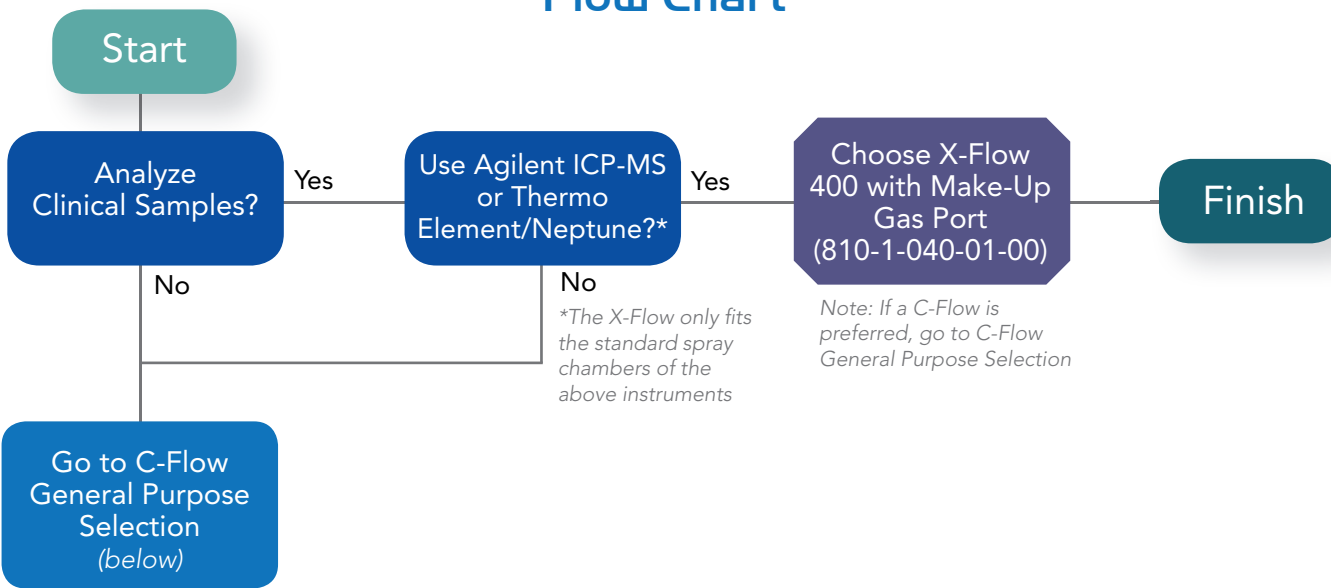


C-Flow (General Purpose) Selection

Flow Chart

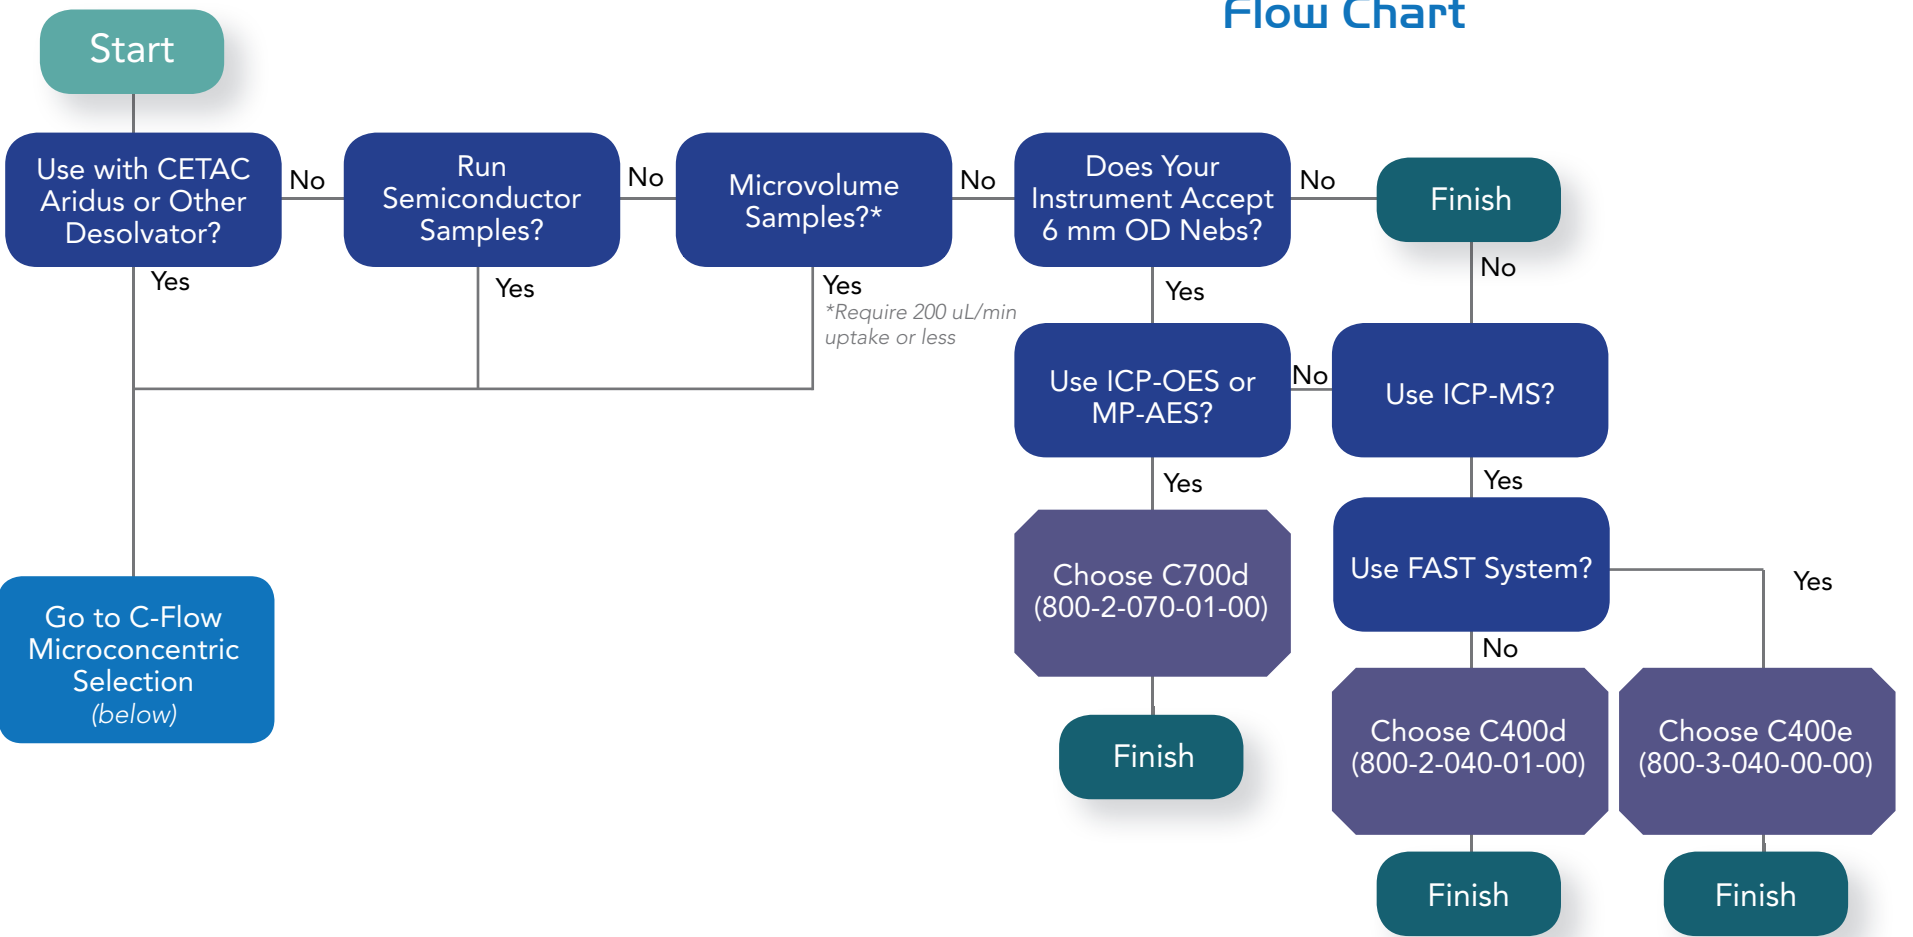

C-Flow (Microconcentric) Selection

Flow Chart

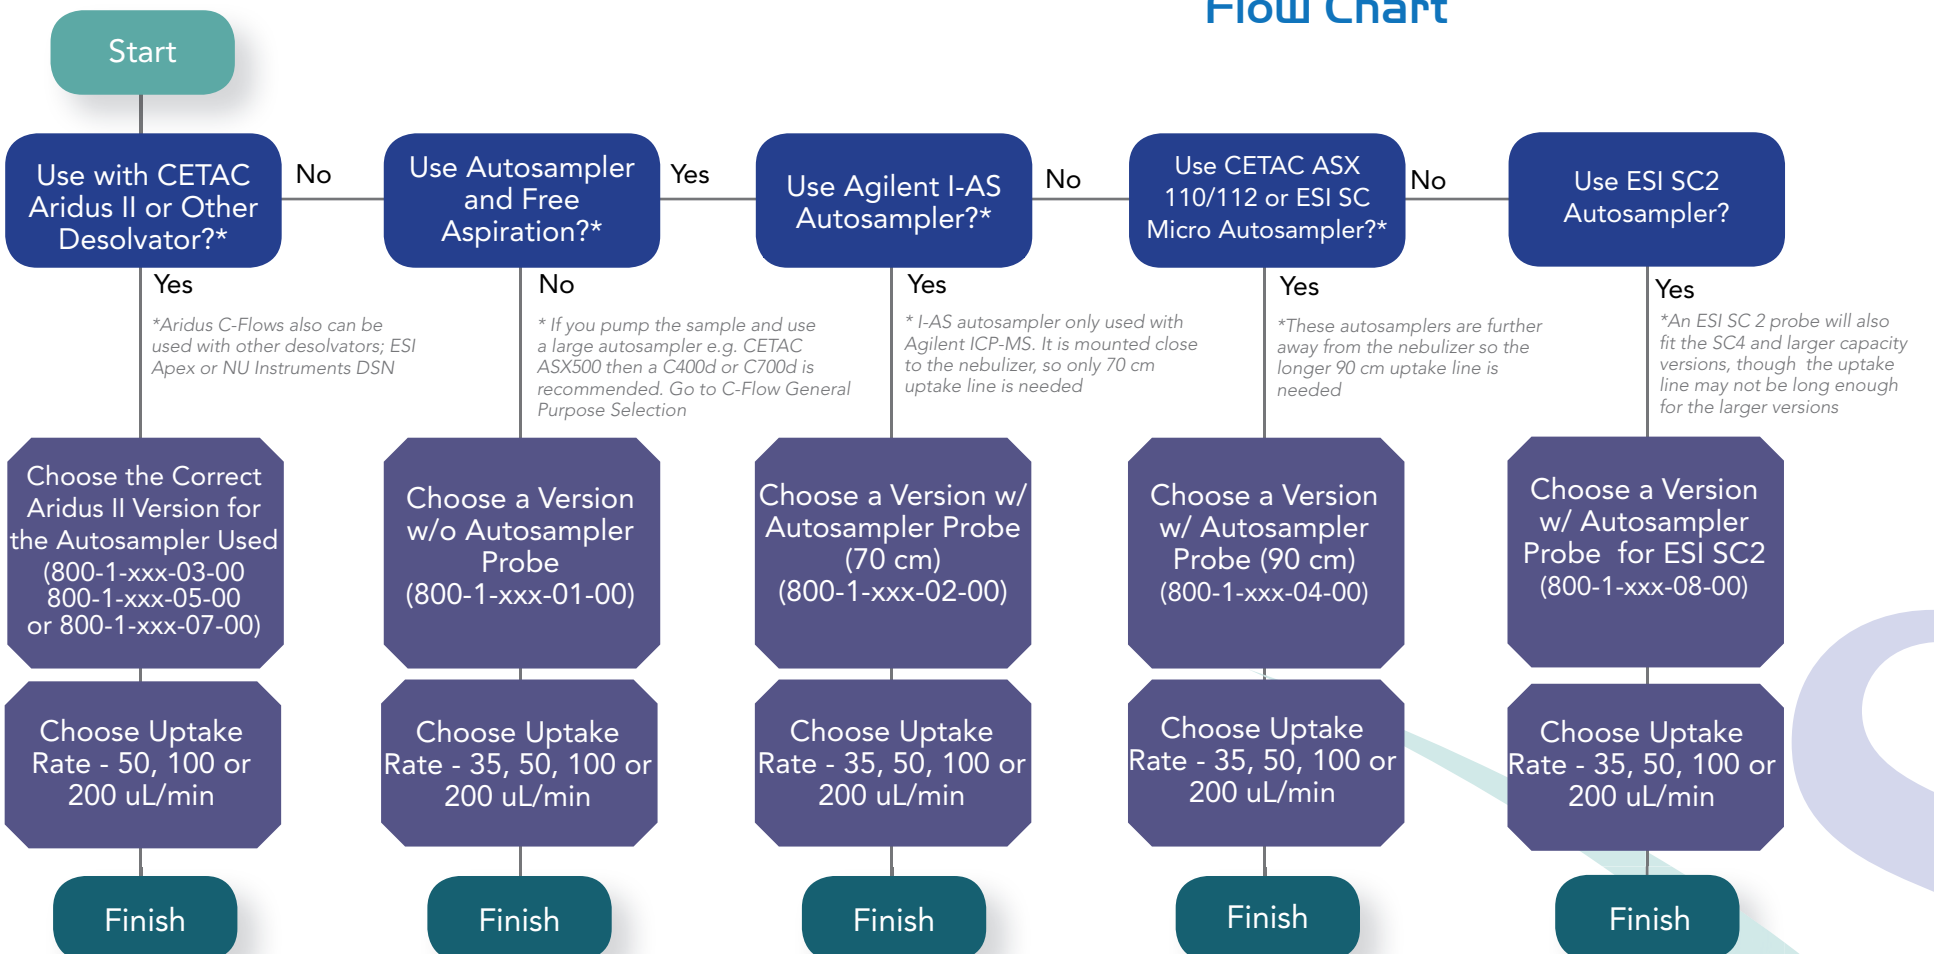

Note: Aridus II C-Flows are assembled at 110 degrees C. They can not be used for normal room temperature applications (i.e. non-desolvator)

Note: The 90 cm C-Flows have a slightly thicker probe to fit ESI autosamplers but can also be used with CETAC ASX 110/112